




ALL PRODUCTS BROCHURE

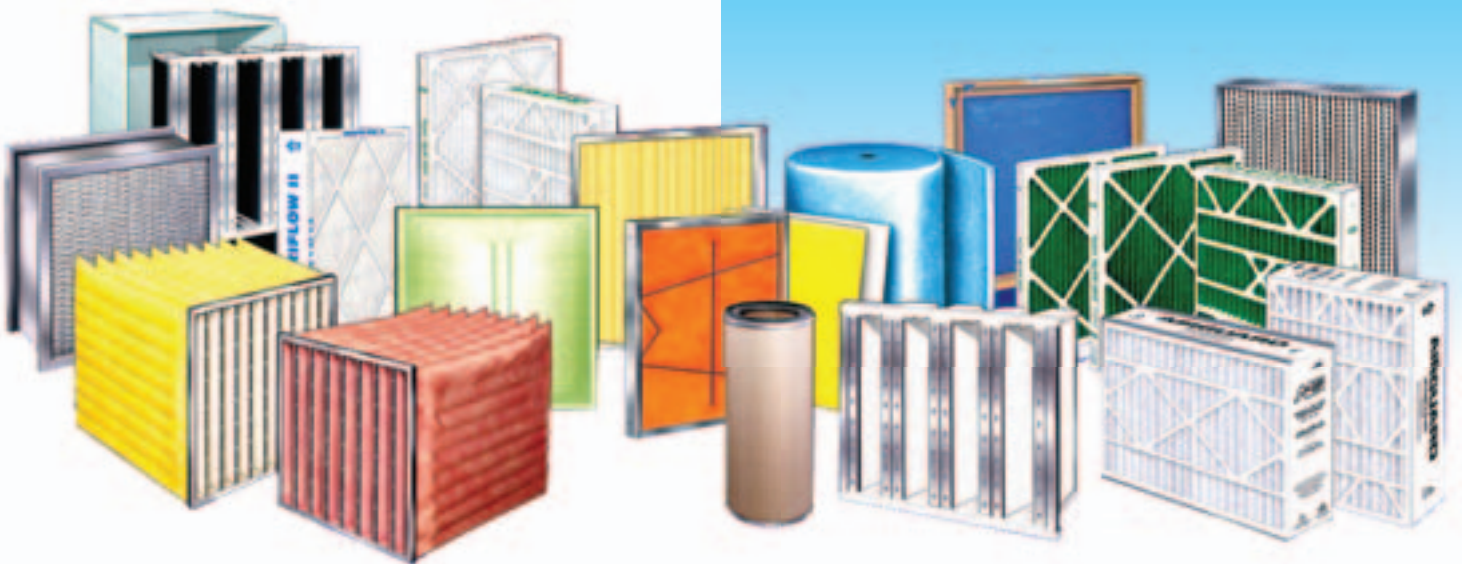

No other air filter manufacturer has a broader line of products to meet the demanding needs of an increasingly complex market.

www.airguard.com

The Industry Looks to Airguard for Leadership in Air Filtration Technology



Expert technical assistance.

Ask for an audit of your air filtration systems by a factory trained Airguard representative.

Worldwide distribution network.

State-of-the-art production facilities, including ISO-9001 Certification of the New Albany, Indiana, Jeffersontown and Campbellsville, Kentucky manufacturing complexes.



State-of-the-art research and testing facilities.



Airguard products...

can be found improving the quality of air around the world in hospitals, office buildings, industrial plants, laboratories, pharmaceutical facilities, schools, museums, sports arenas, residential complexes... and many more.

Other specialized products...

are used for gas turbine air intake systems dust collection, paint overspray collection, gas phase adsorption, lint, ink mist and grease collection.

No other filter manufacturer...

offers a broader line of products to meet your requirements for clean air and better indoor air quality backed by an experienced staff of technically qualified experts who know the air filtration business.

Our worldwide distribution network...

insures Airguard products are available anywhere you need them.

For information...

on products, pricing, performance, applications or technical assistance, contact your authorized Airguard representative.

To find out more about Airguard, visit our web site:
www.airguard.com


EFFICIENCY SELECTION GUIDE

(1) Arrestance	(1) Efficiency	(2) MERV Rating	Filter Type	Airguard Product Selection
60 - 80%	Less Than 20%	MERV 1 - 4	Disposable Panel Filters Permanent Metal Filters Fiberglass Media Latex Coated Natural Fiber Media Foam Media Automatic Roll Filter Media	Disposables Types HS, HD Standard Grade Permalast® Foam Media Types CF, DSF
80 - 90%	Less Than 20%	MERV 5	Disposable Panel Filters Synthetic Media Automatic Roll Filter Media	Tri-Plex 85® StreamLine™ Polyester Media Types YTS, SHP, DMC, DL-1, DL-2
90 - 95%	20 - 30%	MERV 6 - 7	Self-Supported Pocket Filters Ring Panel Filters Pleated Panel Filters	Activator Series (2 Ply, 3 Ply), Series N, Bio•Pure DP-40®, DP-40 Max, SC, DP4-SA Bio-Pure, X-treme
95%	30 - 40%	MERV 7 - 8	Self-Supported Pocket Filters Ring Panel Filters Pleated Panel Filters	SynPak, Ultra II Bags DP 8 (MERV 8), DPGT, PowerGuard™ (MERV-11), DP Class 1, DPHT Fresh Air™, Fresh Air™ Supreme
95 - 98%	40 - 50%	MERV 8 - 9	Extended Surface Pocket Filters	Venti-Pak® VP-4, Clean-Pak™ CP-4
95 - 98%	50 - 60%	MERV 9 - 10	Pleated Panel Filters Extended Surface Pocket Filters Extended Surface Rigid Cell Filters	DP-65 (MERV 11) Venti-Pak VP-5, Clean-Pak CP-5 Vari-Pak, Vari-Pak Model S
99%	60 - 70%	MERV 10 - 11	Extended Surface Pocket Filters Extended Surface Rigid Cell Filters	Clean-Pak CP-6, Venti-Pak VP-6 Bio-Pure Variflow®, Variflow SC, Variflow Compact Series, Variflow II, Variflow II-M, Variflow II-MC, Vari+Plus®, Vari-Pak®, Vari-Pak Model S, Bio-Pure, V-Force
99%	70 - 80%	MERV 12 - 13	Extended Surface Pocket Filters	Multi-Guard MG-7
99%	80 - 90%	MERV 13 - 14	Extended Surface Pocket Filters Extended Surface Rigid Cell Filters	Clean-Pak CP-8, Venti-Pak VP-8, Multi-Guard MG-8, Bio-Pure Variflow, Variflow SC, Variflow Compact Series, Variflow II, Vari+Plus, Vari-Pak, Vari-Pak Model S, Bio-Pure, Legacy 4™, V-Force
99%	90 - 95%	MERV 14 - 15	Extended Surface Pocket Filters Extended Surface Rigid Cell Filters	Clean-Pak CP-9, Venti-Pak VP-9, Multi-Guard MG-9, Bio-Pure Variflow, Variflow SC, Variflow Compact Series, Variflow II, Variflow II-M, Variflow II-MC, Vari+Plus, Vari-Pak, Vari-Pak Model S, Legacy 12™ Bio-Pure, X-treme, V-Force
NA	95% DOP	MERV 16	Extended Surface Rigid Cell Filters	Microguard® 95, Vari+Plus
NA	99.97% 99.99% 99.999% 99.9995%	NA	HEPA/ULPA Filters	Microguard 99, MicroPleat™

(1) Arrestance and Dust Spot Efficiency ratings are based on the ASHRAE 52.1 - 1992 test method.

(2) Minimum Efficiency Reporting Value (MERV) ratings are based on the ASHRAE 52.2 test method.

PANEL FILTERS

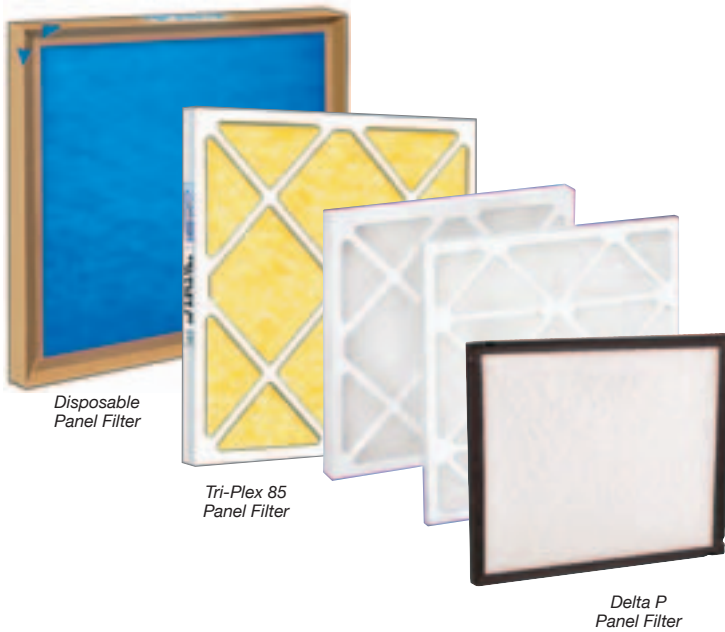

Disposable Panel Filter

Tri-Plex 85 Panel Filter

Delta P Panel Filter

DISPOSABLE PANEL FILTERS

1/2", 1", 2" thicknesses

Disposables


- Fiberglass and Synthetic media
 - Pinch frame construction with scrim retainer
 - 65 - 85% arrestance
- Brochure A-P312, A-F312

Tri-Plex® 85

- Industrial Grade fiberglass media
 - Die cut beverage board frame
 - 75 - 80% arrestance
- Brochure A-TRIPLEX

Delta P

- Superior Grade fiberglass media
 - 1" and 2" thicknesses
 - Pinch frame or die cut box construction
 - MERV 7
- Brochure A-DPD7, A-DPM7

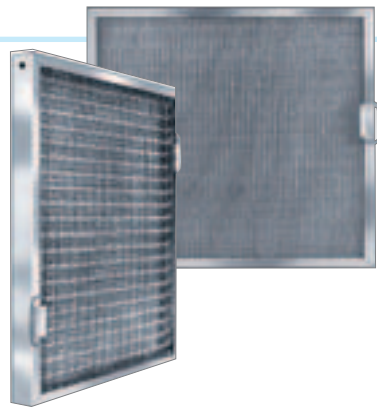


PERMANENT METAL FILTERS

- Type HD - Steel Construction
 - Type HS - Aluminum Construction
 - Washable for repeated use
 - Ideal for high moisture or high velocity conditions
 - 60 - 75% arrestance
- Brochure A-PERMMETAL

SPECIALTY MEDIAS AND FILTERS

Select from a variety of medias and filters for specialized equipment or applications.


- Lint and ink mist collection
 - Replacements for AAF PL-24 and Auto-Airmat
 - Special application medias
- Brochure A-SPECIAL

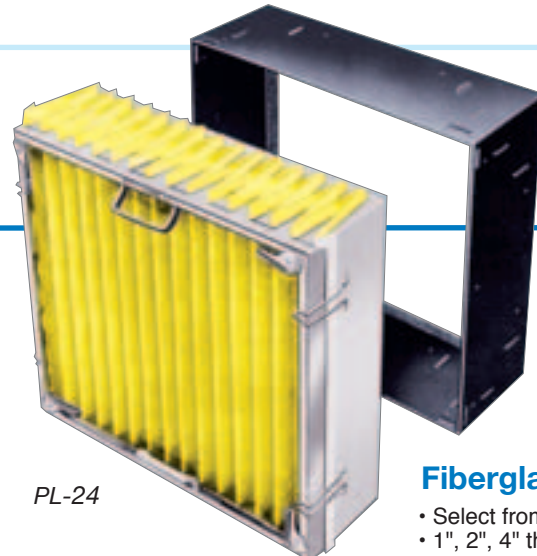

PL-24

Fiberglass Medias

- Select from three grades
 - 1", 2", 4" thicknesses
 - 70 - 90% arrestance
- Brochure A-FIBERMEDIA

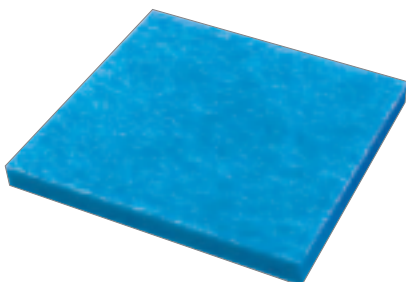

Permalast® Media

- Latex coated natural fiber media
 - 1/2", 1", 2" thicknesses
 - Rigid, self-supporting
 - Washable
 - 50 - 65% arrestance
- Brochure A-PERMALAST




Foam Media

- 1/4", 1/2", 1" thicknesses
 - Washable
 - Operates at -50°F to 250°F
 - 55 - 65% arrestance
- Brochure A-FOAMMEDIA


PLEATED PANEL FILTERS

Widest variety of pleated filters available.
Choose from 18 different styles.

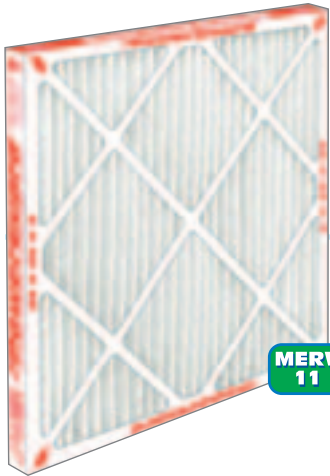

Type DP® 40 Pleated Filters

- 1", 2", 4" thicknesses
 - Die cut beverage board frame
 - Cotton/polyester blended media
 - 14.3 pleats per foot (2")
 - 25 - 30% efficiency, MERV 7
- Brochure A-DP*

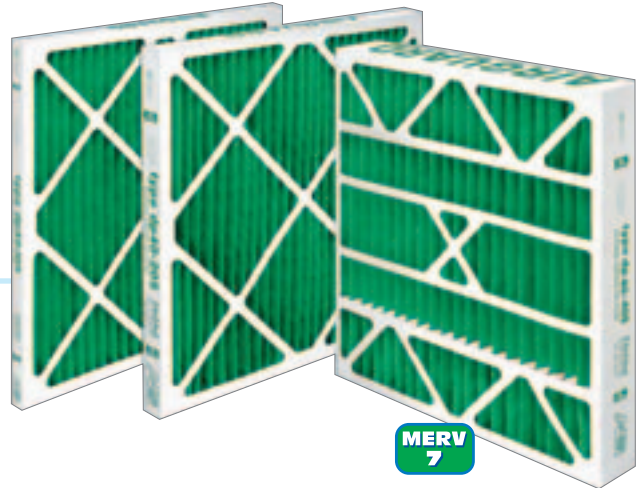

PowerGuard™ Filter

- 1", 2", 4" thicknesses
 - Die cut beverage board frame
 - 100% synthetic media
 - 14.3 pleats per foot (2")
 - 35 - 40% efficiency, MERV 11
- Brochure A-POWERG*


MERV 11

MERV 7



X-treme Pleated Panel Filters

- MERV 7 (Mechanical)
 - 100% Synthetic Media
 - Self Supported
 - Damage Resistant
 - No Metal
 - Fully Incinerable
- Brochure A-XTREME*

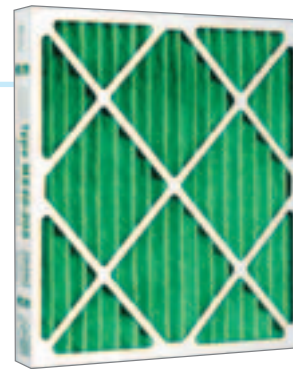

Type DP Max

- Same media and construction as standard Type DP
 - 1", 2", 4", 6" thicknesses
 - 10 pleats per foot (2")
 - 25 - 30% efficiency, MERV 7
- Brochure A-DP*

MERV 8


Type DP4-SA

Side Access Filters

- Same construction as standard Type DP
 - 4" thickness
 - 1" header on top and bottom is designed for side access systems
 - 25 - 30% and 35 - 40% (Power Guard) efficiencies
- Brochure A-SPECIALPLEAT*

Type DP Class 1

- Classified U.L. Class 1
 - 1", 2", 4" thicknesses
 - Non-flammable die cut board frame
 - Ultrafine fiberglass media
 - Available with Standard DP and DP Max pleat counts
 - 35 - 40% efficiency
- Brochure A-SPECIALPLEAT*

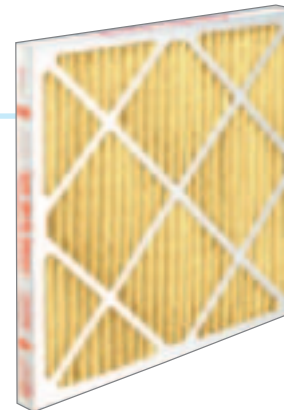

Type DPGT


Heavy Duty Pleated Filters

- Welded wire pleat support grid
 - Pleat stabilizer fingers
 - 2", 4" thicknesses
 - 30 - 35% efficiency, MERV 8
- Brochure A-SPECIALPLEAT*

Mist-Defier

High Moisture Pleats

- Moisture resistant media and frame
 - MERV 7
- Brochure A-MISTD*



Type DPHT

High Temperature Pleated Filters

- Operates up to 500°F
 - 1", 2", 4" thicknesses
 - Aluminized steel frame and support grid
 - Ultrafine fiberglass media
 - 35 - 40% efficiency
- Brochure A-SPECIALPLEAT*

Types DP-65, DP-85, DP-95

High Efficiency Pleated Filters for low velocity applications


- 2", 4" thicknesses
 - Die cut beverage board frame
 - Ultrafine fiberglass media
 - Three efficiencies
 - 50 - 55%, 75 - 80%, 80 - 85%
 - 4" DP-65 provides highest efficiency available in a pleated filter operating at 500 fpm (50 - 55%).
- Brochure A-SPECIALPLEAT*



Type DP 8

- 1", 2", 4" thicknesses
 - Die cut beverage board frame
 - 100% synthetic fiber media,
 - 14.3 pleats per foot (2")
 - 30 - 35 efficiency, MERV 8
- Brochure A-SPECIALPLEAT*

EXTENDED SURFACE POCKET FILTERS

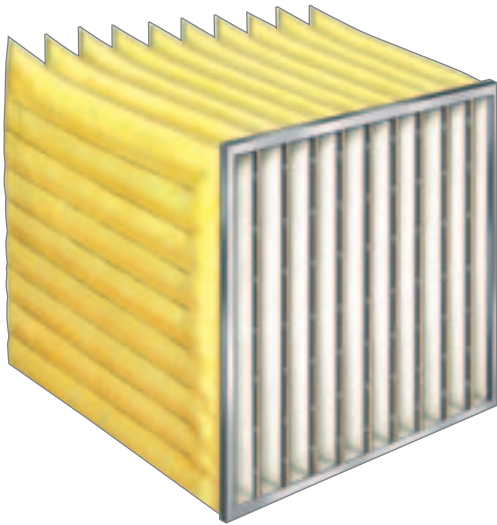

Clean-Pak™ Pocket Filters

Dual layer microfine synthetic media

- Moisture resistant
- Wide variety of pocket lengths and counts
- Fail safe mechanically staked pocket attachment
- Sonic welded pocket construction
- Five efficiencies -
 - 90 - 95%, MERV 14
 - 80 - 85%, MERV 13
 - 60 - 65%, MERV 12
 - 50 - 55%, MERV 11
 - 40 - 45%, MERV 10
- Self-sealing models - (40 - 45%, 60 - 65%)
- U.L. Class 1 and Class 2


Brochure A-POCKET

Venti-Pak® Pocket Filters

Ultrafine, high loft, microglass media

- Wide variety of pocket lengths and counts
- Fail safe mechanically staked pocket attachment
- Double lock stitched pocket formation
- Five efficiencies -
 - 90 - 95%, MERV 14
 - 80 - 85%, MERV 13
 - 60 - 65%, MERV 12
 - 50 - 55%, MERV 11
 - 40 - 45%, MERV 10

Brochure A-POCKET

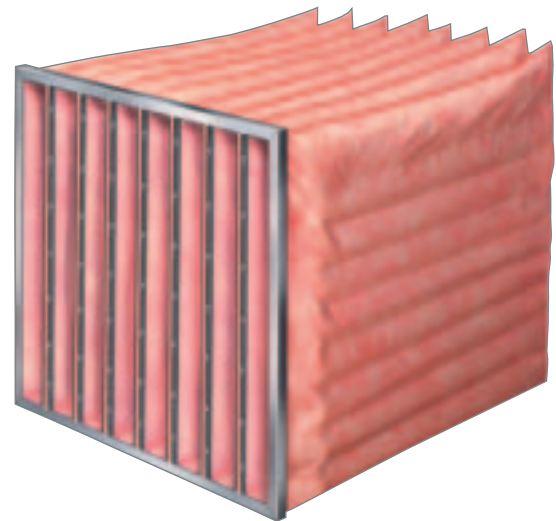


Multi-Guard® Pocket Filters

Next generation, microfine synthetic media

- Electrostatically enhanced - for higher initial efficiency
- Gradient density fiber structure - for higher dust holding capacity
- Sewn pocket construction
- Three efficiencies -
 - 90 - 95%, MERV 15
 - 80 - 85%, MERV 13
 - 70 - 75%, MERV 12

Brochure A-POCKET

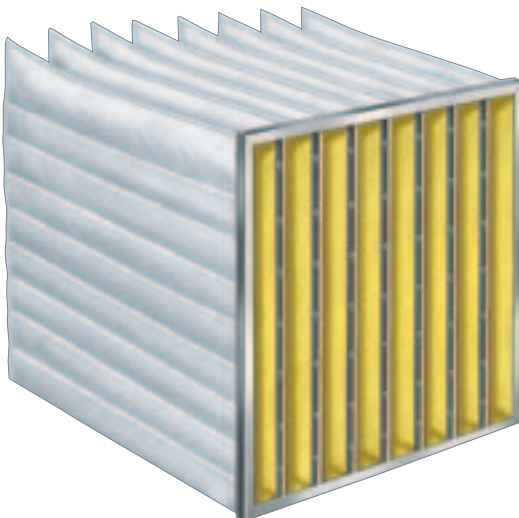

EXTENDED SURFACE RIGID CELL FILTERS

NEW



Legacy

- Low Resistance
 - High Efficiency
 - High Dust Holding Capacity
 - 4" MERV 14, 12" MERV 15
 - 100% Synthetic Media
 - Moisture Resistant
 - Chemical Resistant
 - All Plastic Construction
 - Fully Incinerable
 - Light Weight
 - UL 900 Class 1
- Brochure A-LEG



V-Force®

- All Plastic Construction
 - Highly Durable Dura-Tuff™ 100% Synthetic Media
 - Moisture and Chemical Resistant
 - Fully Incinerable
 - Low Resistance
 - Three efficiencies - 90-95% (MERV 14), 80-85% (MERV 13), 60-65% (MERV 11)
 - UL 900 Class 1
- Brochure A-VF

Vari+Plus®

High Capacity Extended Surface Mini-Pleat Filters

- Ultrafine microglass paper media
 - Moisture resistant construction
 - Continuous bead, mini-pleat adhesive separators
 - V-bank assembly of mini-pleat media packs
 - Large media area, low resistance
 - Five efficiencies - 95% (MERV 15), 90-95% (MERV 14), 80-85% (MERV 13), 60-65% (MERV 11), 95% DOP (MERV 16)
- Brochure KA-440

Vari+Plus® MC

Vari+Plus style mini-pleat media paks contained in galvanized steel cell sides.

Brochure A-VPMC



Vari+Plus® VP

- All plastic construction
 - No metal components
 - Dura-Tuff 100% synthetic media
 - Fully incinerateable
 - Suitable for selected corrosive or chemical environments
 - Three efficiencies - 90 - 95%, (MERV 15) 80 - 85%, (MERV 13) 60 - 65%, (MERV 11)
- Brochure A-VPVP

Variflow®


Extended Surface Rigid Cell Filters

- Ultrafine microglass paper media
 - Moisture resistant construction
 - Single header, double header, no header models
 - Metal and wood cell sides
 - Corrugated aluminum separators
 - High temperature models up to 900°F
 - Three efficiencies - 90-95% (MERV 14), 80-85% (MERV 13), 60-65% (MERV 11)
- Brochure A-VFLOW

Variflow® SC

Same construction as Variflow, except less media

Product Bulletin A-VFLOWSC



Variflow® Compact Series

Extended Surface Rigid Cell Filters - 2", 4" deep

- Ultrafine microglass paper media
 - Alumined steel cell sides
 - Corrugated aluminum separators
 - High temperature operation up to 750°F
 - Three efficiencies - 90-95% (MERV 14), 80-85% (MERV 13), 60-65% (MERV 11)
- Brochure A-VFLOWCOMPACT

Vari-Pak®


Extended Surface Rigid Box Filters

- Ultrafine high loft microglass media
 - Pleated construction with pleat stabilizers (fingers) on both sides
 - Galvanized steel cell sides
 - Box construction (no header) and header models
 - Four efficiencies - 90-95% (MERV14), 80-85% (MERV 13), 60-65% (MERV 11), 50-55% (MERV 10)
- Brochure A-VPK

Vari-Pak® Model S

Same construction as standard Vari-Pak filters, except made with dual layer, microfine synthetic media.

Brochure A-VPK



HEPA FILTERS


SEPARATOR STYLE FILTERS

Microguard®

- Ultrafine microglass paper media
 - Wood and metal construction
 - Gasket seal and gel seal models
 - Wide variety of cell side configurations
 - Corrugated aluminum separators
 - Four efficiencies - 95%, 99.97%, 99.99%, 99.999% on .3 microns
- HEPA Brochure A-MICROG99; 95% DOP Brochure A-MICROG95*

Microguard® SC Series


Same media and construction as standard Microguard, except fewer pleats. 99.97% efficiency

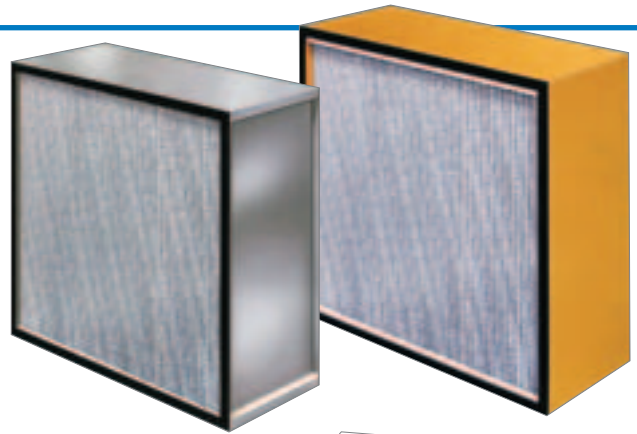


MINI-PLEAT SEPARATOR STYLE FILTERS

MicroPleat™

- Ultrafine microglass paper media
 - Anodized extruded aluminum cell sides
 - Gasket seal, gel seal and knife edge models
 - Continuous bead mini-pleat adhesive separators
 - Five efficiencies - 99.97%, 99.99%, 99.999% on .3 microns; 99.999%, 99.9995% on .12 microns
 - U.L. Class 1
- Brochure A-MICROPLEAT*

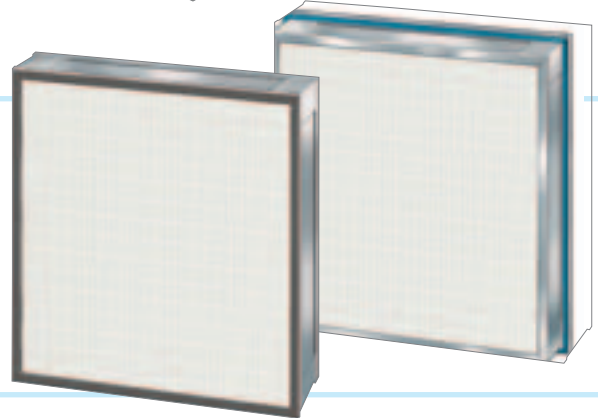

HIGH CAPACITY HEPA FILTERS

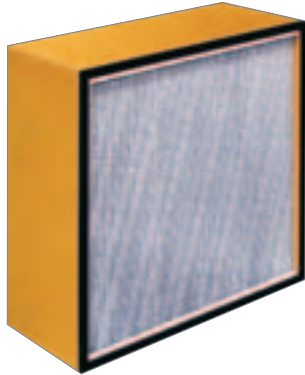


Microguard Separator Style

- 500 fpm @ 1.35" W.G.
 - 99.97%, 99.99% efficiencies
- Brochure A-MICROG99*

Micro-V 2000 Mini-Pleat Style

- 500 fpm @ 1.2" W.G.
 - 99.97%, 99.99% efficiency @ 500 fpm
 - 99.999% efficiency @ 400 fpm
- Brochure A-MICROPLEAT*

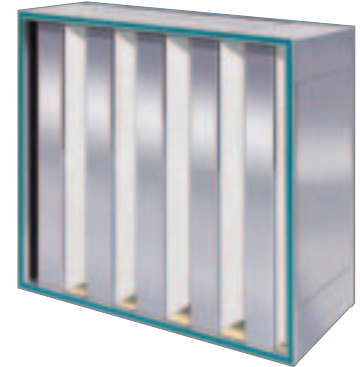

Micro-V 2400


- 600 fpm @ 1.35" W.G.
- 99.97% efficiency

CLEANROOM PRODUCTS



Disposable Ducted Ceiling Modules


- Anodized extruded aluminum construction
 - 2' x 2' and 2' x 4' sizes
 - Low profile design - 5" deep. Fits into T-bar ceiling grid
 - Adjustable diffuser/damper
 - Five efficiencies - 99.97%, 99.99%, 99.999% on .3 microns; 99.999%, 99.9995% on .12 microns
 - U.L. Class 1
- Brochure A-MICROPLEAT*

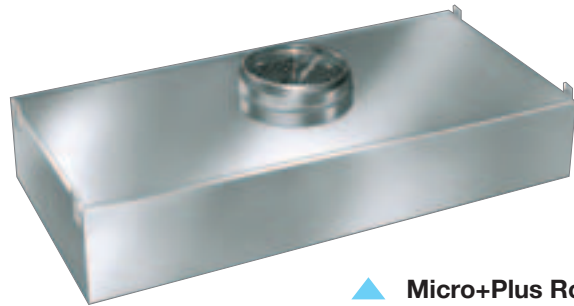

Micro+Plus Room Side Replaceable Ceiling Modules

- Permanent housing with room side replaceable HEPA filter
 - Ducted inlet design
 - Low Profile - 7" deep
- Brochure A-MICROPLUS*

DISPOSABLE PANEL FILTERS

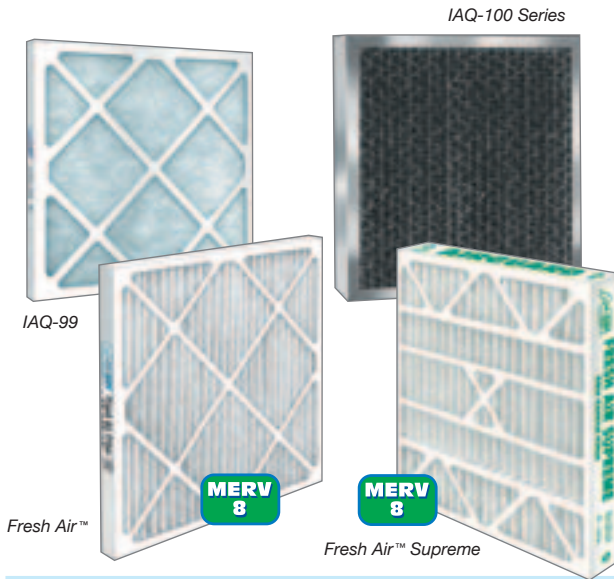

Fresh Air™

- Combination 30-35%, MERV 8 pleated prefilter with activated carbon
- Die cut beverage board frame
- 1", 2", 4" thicknesses
- Self-supported media, no metal *Brochure A-FRESH*

Fresh Air™ Supreme

- Chemically enhanced carbon media
- Removes wider range of odors than standard activated carbon
- 30-35% efficiency, MERV 8
- Self-supported media, no metal *Brochure A-FRESHSUPREME*

IAQ-99

- Combination polyester prefilter with bonded carbon fibers
- Available with die cut beverage board frame or pad design
- 1", 2" thicknesses *Brochure A-IAQ99*

IAQ-100 Series

- Select from activated carbon, potassium permanganate or blended media
- Honeycomb carbon loading
- 25%, 50%, 75% and 100% fill
- Steel frame
- 3/8", 1", 2" thicknesses

IAQ-108

- Self-sealing ring panel construction
- Combination polyester prefilter with bonded carbon fibers



EXTENDED SURFACE FILTERS

Vari•Pure®

High Capacity Activated Carbon Filters

- Select from activated carbon, impregnated carbon, potassium permanganate or blended media
- Effective on wide variety of gases and odors
- Vari•Sock afterfilter prevents carbon dusting downstream
- 12" deep

Brochure A-VPURE

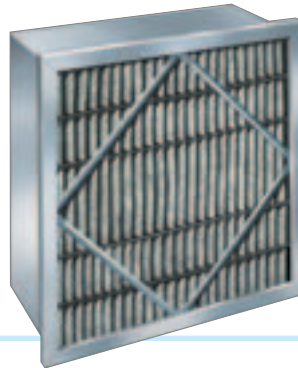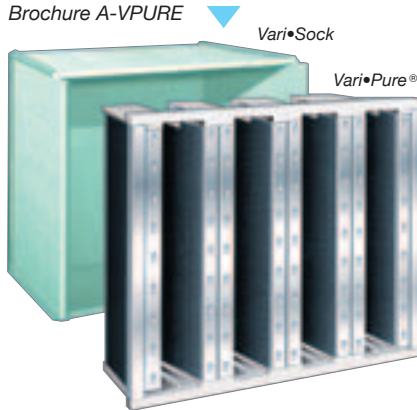

Vari-Klean™

- Ultra High Efficiency Carbon Adsorber
 - Pleated media design increases carbon content
 - Offers high first pass removal efficiency
- Brochure A-VKLEAN*

REPLACEMENT TRAYS AND ELEMENTS

Available with activated carbon, potassium permanganate or blended media

Refillable Carbon Trays

- Wide variety of sizes to fit various manufacturers' housings
- Cold rolled steel frame


AG-12 Element

- Fits Purafil and Flanders housings
- Refillable design
- Contains 30 pounds of carbon

AG-18 Element

- Fits AG-22 and Purafil PC-22 housings
- Refillable and disposable models
- Contains 18 pounds of carbon

CARBON FILTER HOUSINGS

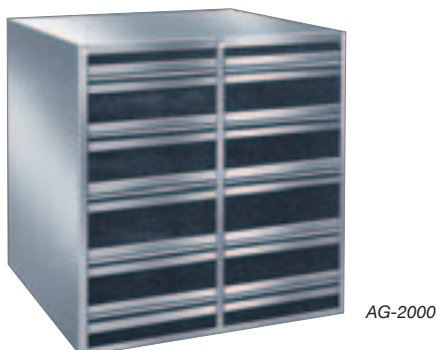

AG-2000 Front Access Housing

- 14 gauge cold rolled steel construction
- Easily removable access grid
- Contains 90 pounds of carbon (10 trays)



Side Access Housings

- 16 gauge steel construction
 - Adaptor flanges to match up with air handling units
 - 2" prefilter or after filter track
- Brochure A-SIDEACCESS*

AG-144 Carbon Housing

- 16 gauge cold rolled steel construction
- Holds four IAQ-100 carbon panels
- Built-in prefilter and final filter tracks
- Contains 48 pounds of carbon


AG-22 Carbon Housing

- 16 gauge cold rolled steel construction
- Holds four AG-18 carbon elements
- Contains 72 pounds of carbon

AUTOMATIC ROLL FILTER MEDIAS

Choose from seven styles of media to fit major brands of auto roll equipment, including:

Airguard, AAF, Air Maze, BLC, Cambridge, Carrier, Commercial, Continental, Farr, MSA, Trane.

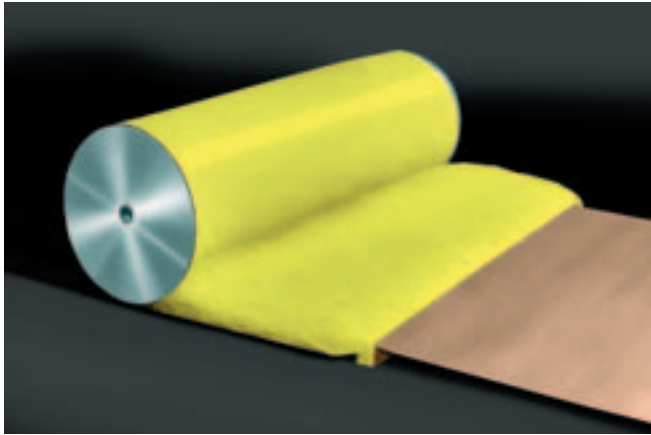

FIBERGLASS MEDIAS

- Progressive density media construction
- 2-1/2" thick
- Scrim mesh netting backing for high tensile strength
- Adhesive coated for high dust holding capacity
- 70 - 90% arrestance

Brochure A-AUTOROLL, A-PBAUTO


SYNTHETIC MEDIAS

- 1/2", 1" thicknesses
- Scrim mesh netting backing for high tensile strength
- Dry and tackified medias
- 70 - 90% arrestance

Brochure A-AUTOROLL, A-PBAUTO

INTERNALLY SUPPORTED FILTERS

Designed for use with compatible wire basket retainers.

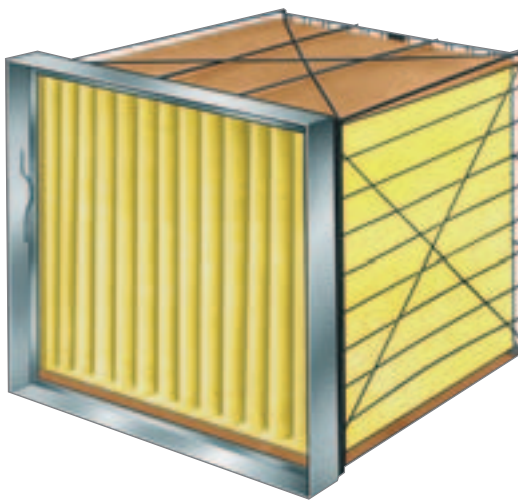

Series AG Filter Elements

For use in Farr HP Series systems


- Deep pleated media design
- Collapsible for compact shipping and storage
- Three depths - 8", 12", 24"
- Four efficiencies - 25 - 30%, 60 - 65%, 80 - 85%, 90 - 95%

Brochure A-SERIESAG

ANTIMICROBIAL TREATED FILTERS


For improved IAQ applications to inhibit growth of microorganisms on the filters.

Bio•Pure®... no other manufacturer has a broader line of antimicrobial treated filters than Airguard. Life cycle tests verify continued effectiveness over the life of the filter.




Bio•Pure Pleated Panel Filters

- 1", 2", 4" thicknesses
- Available with 14.3 and 10 pleats per foot (2")
- 25 - 30% efficiency, MERV 6

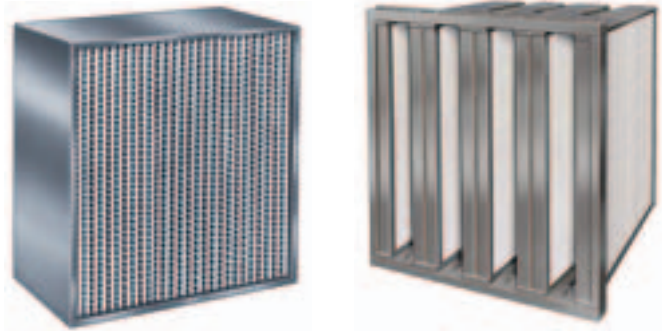


Bio•Pure High Efficiency Rigid Cell Supported Pleat Filters

- Ultrafine microglass paper media
- 90 - 95% efficiency
- Select from two styles of construction: Corrugated aluminum separators (above left) Continuous bead mini-pleat adhesive separators (V-bank media packs) (above right)

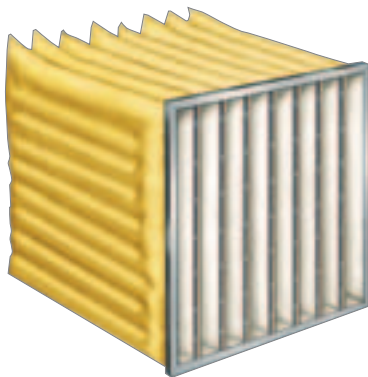

Bio•Pure High Efficiency Extended Surface Pocket Filters

- Dual layer microfine synthetic media
- Wide variety of pocket lengths and counts
- Double lock stitched pocket formation
- Fail safe mechanically staked pocket attachment
- 90 - 95%, 80 - 85%, 60 - 65% efficiencies

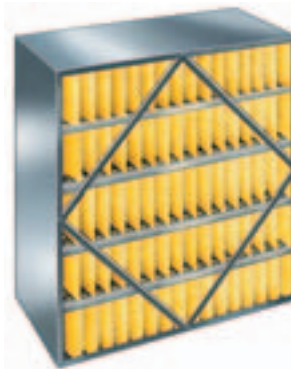

Bio•Pure High Efficiency Rigid Cell Box Filters

- Dual layer microfine synthetic media
- Pleated media design with pleat stabilizers on both sides
- 90 - 95%, 80 - 85% efficiencies

PAINT SPRAY BOOTH FILTERS

Complete line of air filters for paint spray booth applications.



INTAKE PANEL FILTERS

- Self-sealing - No latches required
- Internal wire support frame
- Tackified for high particle retention
- 90 - 95% arrestance

Activator Series - 2-Ply or 3-Ply media construction

Activator Series



ATI-600



ATI-300

DIFFUSION MAX

ATI-600

- Dual layer media construction with scrim backing
- Internal wire support frame

ATI-300

- Dual layer media construction with scrim backing
- Internal wire support frame



Type AG/FG fiberglass

Poly backed paper

Stackguard

PAINT ARRESTOR MEDIAS

Select from a wide variety of paint overspray collection medias

- Fiberglass
- Stackguard® polyester backed fiberglass
- Type AG/PS polyester
- Expanded paper
- Polyester backed expanded paper



**RING PANELS, SELF-SUPPORTED
POCKET FILTERS & POLYESTER MEDIA**



RING PANELS, LINKS, SLIP-ONS

The Activator™ Series
Select from 2-ply and 3-ply models


- 2-Ply - MERV 6
- 3-Ply - MERV 7
- Self sealing, no latches required
- Tackified media
- Made from tough, polyester fibers

Slip-On Panel Filter



2-ply - MERV 6


3-ply - MERV 7

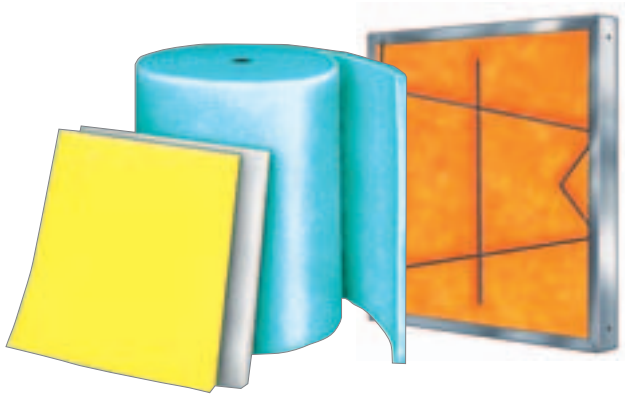

StreamLine™ Polyester Medias

- Select from three choices of medias - 1/2", 1", 2" thicknesses
- Made from multi-denier, recycled polyester fibers
- Tackifier increases particle retention
- 85 - 95% arrestance

SynPak - Three ply media construction,
15" deep, 2, 3 or 4 pockets. 35 - 40% efficiency, MER

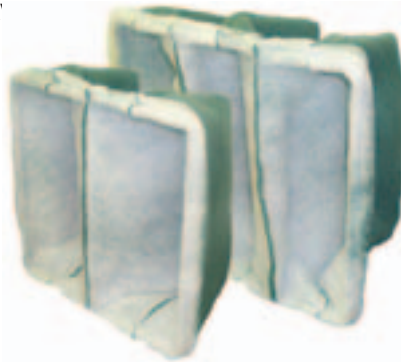

Ultra II

- Air Flow 150 FPM
- Initial Static .05" W.G.
- Average Paint Spray Removal Efficiency 99.70%
- Pads and Blankets cut to size
- Bags available in two and three pocket models


Bio•Pure Polyester Media

- 1/2", 1", 2" thicknesses
- Made from recycled polyester fibers
- Available in pads and bulk rolls
- Tackified media
- 85 - 90% arrestance




Bio•Pure Ring Panels and Links

- 2-ply media construction
- Self-sealing, no latches required
- Tackified media
- 85 - 90% arrestance, MERV 6

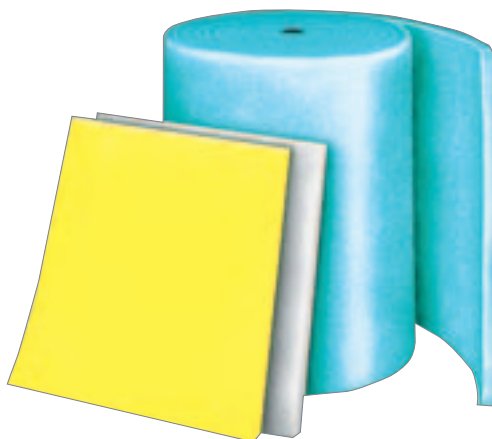

REPLACEMENT FILTERS FOR TURBOMACHINERY AIR INTAKE SYSTEMS

PREFILTERS FOR BARRIER FILTER SYSTEMS

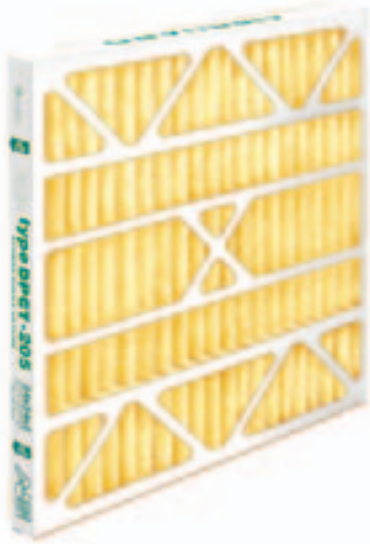

Type DPGT Pleated Panel Filters

- 100% synthetic fiber media
 - Die cut beverage board frame
 - 30 - 35% efficiency, MERV 8
- Brochure A-SPECIALPLEAT*

FINAL FILTERS FOR BARRIER FILTER SYSTEMS





Vari-Plus® VP

- All plastic construction
- No metal components
- No rivets, screws, faceguards or cross bars
- Dura-Tuff 100% synthetic media resists tearing, abrasion
- Chemical and corrosion resistant
- Fully incinerateable
- V-bank assembly of mini-pleat media packs
- Available with Vari-Pad direct mount pocket style prefilter
- 90-95% (MERV 15) and 60-65% (MERV 11) efficiencies

Filter Media Pads

- Fiberglass (2", 4")
- Synthetic (2")

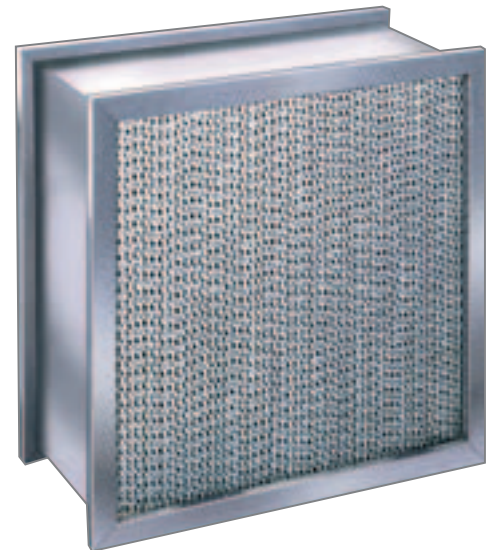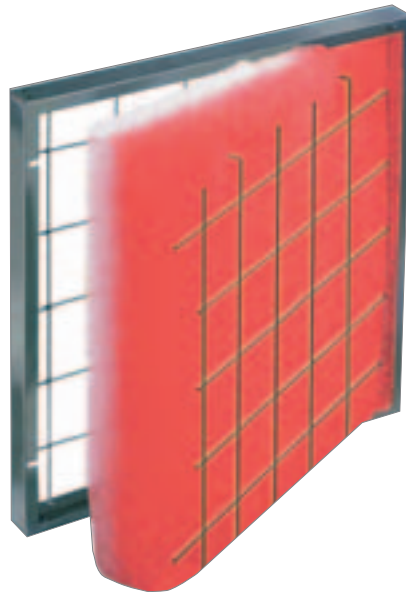

CARTRIDGES FOR SELF-CLEANING PULSING SYSTEMS OR NON-PULSING BARRIER FILTER EQUIPMENT

- Pleated cartridges for pulse-jet systems
- Expanded metal retainers on both sides
- Variety of media choices



Duraflow®

- Ultrafine microglass paper media
- Corrugated aluminum separators
- Galvanized steel construction
- Faceguards on both sides
- 90 - 95%, 60 - 65% efficiencies

Vari-Pak® GT

- High loft fiberglass or synthetic media
- Expanded metal pleat support
- Pleat support stabilizers on both sides
- 90-95%, 80-85%, 60-65% efficiencies

DUST COLLECTOR CARTRIDGES



◀ CARTRIDGES FOR PULSE-JET DUST COLLECTION EQUIPMENT

- Replacement cartridges for most brands of pulse-jet dust collectors
- Wide selection of sizes
- Full range of media choices:
 - Blended cellulose/polyester
 - 100% spun bond polyester
 - Aluminized
 - Carbon impregnated
- Pre-treated cartridges
Brochure A-DC, A-SPUNBOND

RESIDENTIAL AIR FILTRATION PRODUCTS

REPLACEMENT FILTERS FOR RESIDENTIAL AIR CLEANERS


- Trion Air Bear (MERV 8)
- Honeywell (MERV 8)
- Sizes to fit all major models
Brochure A-RESIDENT

Honeywell



Air Bear


SIDE ACCESS HOUSINGS

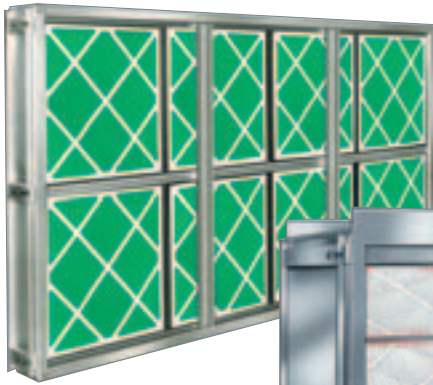

Flat Bank Housing

Flat Bank Housings


- Single stage units
 - Holds 2" or 4" thick filters
 - 16 gauge aluminized steel construction
- Brochure A-FBANK*

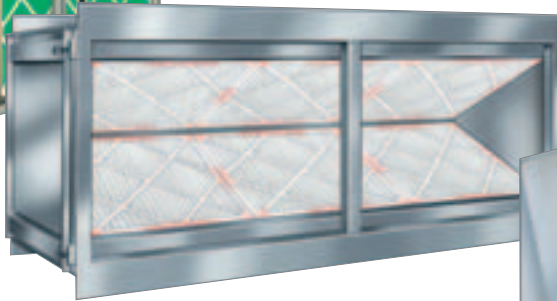

V-Bank Housing

V-Bank Housings


- V-bank filter arrangement
 - Holds 2" thick filters
 - 16 gauge aluminized steel construction
 - Adaptor flanges for air handling units or ductwork arrangements
- Brochure A-VBANK*

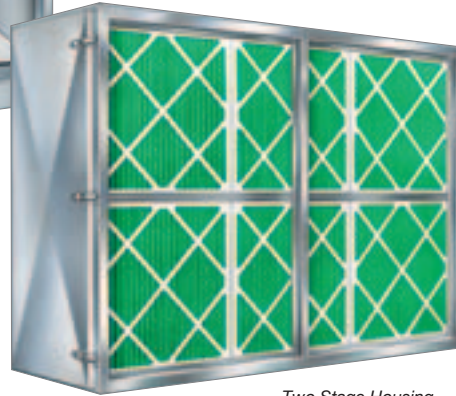

Two Stage Housing

Two Stage Housings

- Five depths - 12", 21", 26", 38", 42"
 - 2" or 4" prefilter track with 1" track for header style final filter
 - 16 Gauge aluminized steel construction
 - Adaptor flanges for air handling units or ductwork arrangements
- Brochure A-TWOSTAGE*

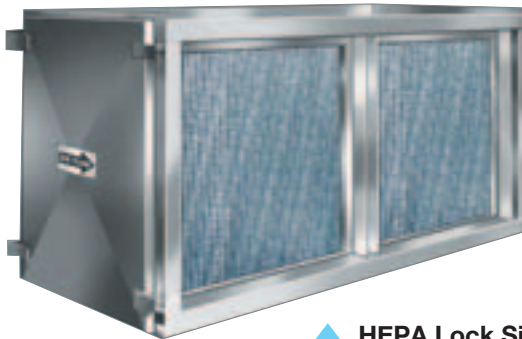


HEPA Lock Side Access Housing

HEPA Lock Side Access Housing

- 16 gauge aluminized steel construction
 - 24" deep - holds 5-7/8" or 11-1/2" deep filters
 - Lever action filter clamping mechanism
- Brochure A-HEPALOCK*

HOLDING FRAMES & LATCHES

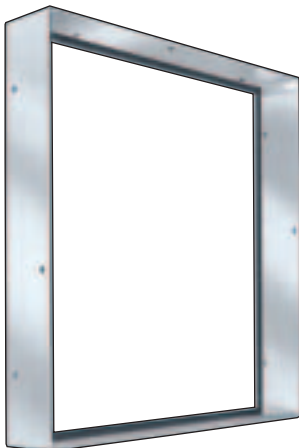

Uni-Lok® Filter Holding Frame

Uni-Lok® Filter Holding Frames


- 16 gauge galvanized steel
 - Pre-punched mounting holes
 - Factory applied gaskets
 - Wide variety of latches to hold all types and sizes of filters
- Brochure A-UNILOK*

TYPE AG-8 Filter Holding Frames

- Replacement for Farr Type 8 frames and latches
- Brochure A-TYPEAG8*

Type HDS HEPA Holding Frame

- Creates high integrity seal for HEPA installations
 - 16 gauge aluminized steel construction
 - Two depths - holds 5-7/8" or 11-1/2" deep filters
 - Spring loaded clamping bolt
- Product Bulletin A-TYPEHDS*

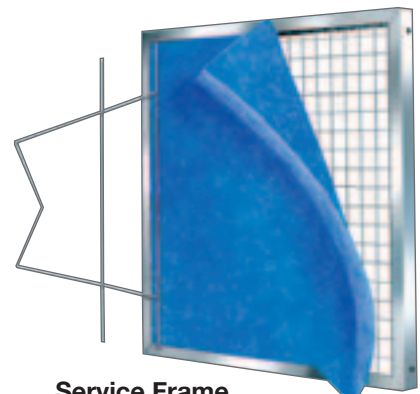

Service Frame

- Holds filter media pads
 - Sized to fit inside Uni-Lok, Type AG-8 or other manufacturers' brands of filter holding frames
 - 22 gauge galvanized steel frame
 - 1/2", 1", 2" thicknesses
 - Wire support grid - both sides
- Brochure A-SERVFRAME*

INNOVATIVE CLEAN AIR SOLUTIONS

Airguard Products Providing Clean Air for People and Processes Worldwide...



Founded in 1964, Airguard has grown to be one of the world's foremost manufacturers of air filtration products for the commercial, industrial and institutional markets.

The basic premise on which the company was founded is to provide replacement filters for all types of HVAC systems. Whatever type of air filtration equipment is installed in your facilities, Airguard can provide a direct replacement or recommend alternatives for improved indoor air quality, lower cost and longer service life.

Airguard offers products in every category of air filters from disposable panel filters and pleated filters to high efficiency extended surface filters and HEPA filters. A wide variety of filters for specialized applications is also available, including paint overspray collection, lint and ink mist collection, gas phase adsorption and dust collection.

No other air filter manufacturer has a broader line of products to meet the demanding needs of an increasingly complex market.

AG-ALL-207



a CLARCOR company




CLARCOR Air Filtration Products
 P. O. Box 32578 • Louisville, KY 40232
 Customer Service Team: 1-866-247-4827 • Fax: 1-800-784-3458
 Email: mailbag@airguard.com • www.airguard.com

www.airguard.com



Distributed by:

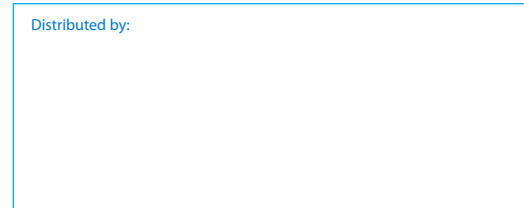

© 2007 CLARCOR Air Filtration Products. CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice.